



APPLICATION
EXAMPLE



EXTERIOR
DRAWING

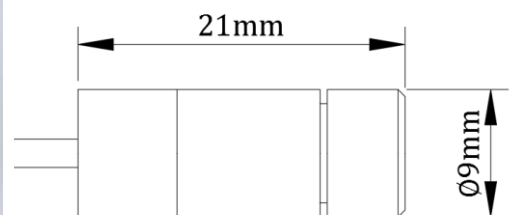

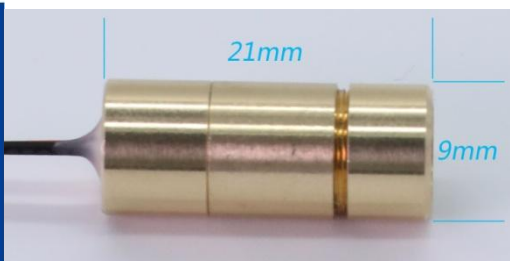

PERFORMANCE INDEX

Optics

Wavelength (nm)	515-520nm	635-650nm	780-980nm
Wavelength Error	±5nm	±5nm	±10nm
Power(mw)	0.5-10mW	0.1-10mW	100-500mW
Light Type	Line/Cross		
Beam Angle	5-130°		
Straightness	≤1%		
Focus	Manual Focus		
Work Distance	Suitable for use within 2 meters		

Electrical

Laser Driven mode	CW/TTL		
Work Voltage(V)	3-5v/12-24v		
Work Current(mA)	<100mA	<35mA	<700mA
Tail Line	Red Black Line		
Protection	Anti-reverse, Anti-interference		

Mechanical

Dimension(mm)	Φ9×21mm
Material	Brass

Other

Working Temperature	-10 ~ 50°C (Conventional)
Storage Temperature	-40 ~ 85°C (Conventional)
Working Life	≥10000Hours