



APPLICATION
EXAMPLE

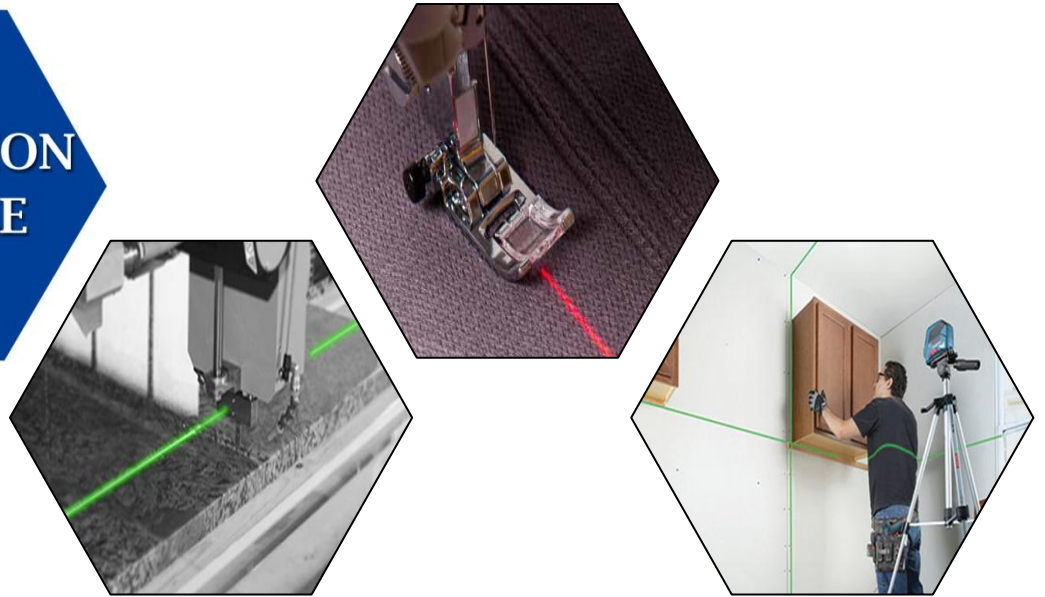

EXTERIOR
DRAWING

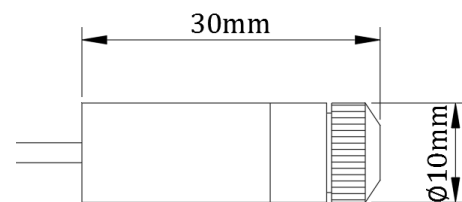

PERFORMANCE INDEX

Optics

| | |
|-------------------|--|
| Wavelength (nm) | 635-650nm |
| Wavelength Error | ±5nm |
| Power(mw) | 0.1-10mW |
| Light Type | Dot |
| Beam Angle | NA |
| Straightness | NA |
| Focus | Manual Focus |
| Work Distance | Provide laser modules with customized working distance |

Electrical

| | |
|-------------------|------------------------------------|
| Laser Driven mode | CW/TTL |
| Work Voltage(V) | 3-5v/12-24v |
| Work Current(mA) | <35mA |
| Tail Line | Red Black Line/DC Line/Double line |
| Protection | Anti-reverse, Anti-interference |

Mechanical

| | |
|---------------|-------------------------|
| Dimension(mm) | Φ10×30mm |
| Material | Black Aviation Aluminum |

Other

| | |
|---------------------|-----------------------------|
| Working Temperature | -10 ~ 50°C (Conventional) |
| Storage Temperature | -40 ~ 85°C (Conventional) |
| Working Life | ≥10000Hours |