




APPLICATION
EXAMPLE



EXTERIOR
DRAWING

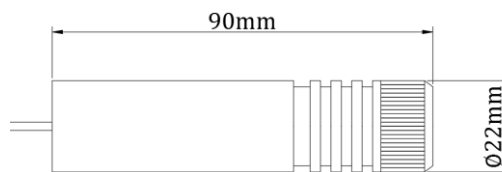

PERFORMANCE INDEX

Optics

Wavelength (nm)	515-520nm	635-650nm
Wavelength Error	±5nm	±5nm
Power(mw)	0.5-10mW	50-130mW
Light Type	Line	
Beam Angle	120°	
Straightness	≤0.1%	
Focus	Fixed Focus	
Work Distance	Suitable for use within 10 meters	

Electrical

Laser Driven mode	CW/TTL	
Work Voltage(V)	3-5v/12-24v	
Work Current(mA)	<100mA	<250mA
Tail Line	DC Line/Black Line	
Protection	Anti-reverse, Anti-interference	

Mechanical

Dimension(mm)	Φ22×90mm
Material	Black Aviation Aluminum

Other

Working Temperature	-10 ~ 50°C (Conventional)
Storage Temperature	-40 ~ 85°C (Conventional)
Working Life	≥10000Hours